

MATIC Oil

360 2x16/2x24 A

360 2x16/2x24 Z



Oil up to 360°C

Heating capacity **2 x 16 kW** | **2 x 24 kW**

Cooling capacity **2 x 90 kW** @ 360°C

Cooling system indirect (shell & tube)

Robust Mechanical Design

- Triple bearing high temperature pump, developed and produced by Tool-Temp
- Inverted, limescale-free spiral tube Heat exchanger
- Fully immersed heaters made of high-temperature corrosion-free Nickel alloy (Incoloy 800)
- Maintenance-free flow meter
- Stainless-steel solid piping

Features

- IRIS control system
- Pt100 temperature sensors in feed and return lines
- Heater control by solid-state relays
- Variable-speed pump with automatic eco-mode
- Mould evacuation
- Leakstop operating mode

Predictive Maintenance


- Continuous monitoring and self-diagnosis of the system
- Clear indication and description of errors
- Condition monitoring of the heat-transfer fluid
- Condition monitoring of the pump (coming soon)

Safety


- Multiply redundant, mechanical temperature limiter
- Pump motor monitored by the variable-frequency drive
- Configurable safeguard limits and corresponding reactions
- Configurable audible alarm

Operation


- Industrial-grade, tiltable 7" IPS touch-screen
- Intuitive user interface for commissioning and operation
- Broad range of connectivity features including external temperature sensor
- Automatic actions for common operations
- User-defined time-resolved recipes

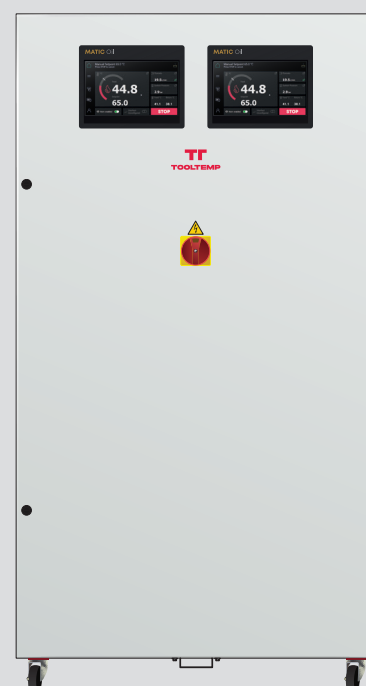

Cooling capacity

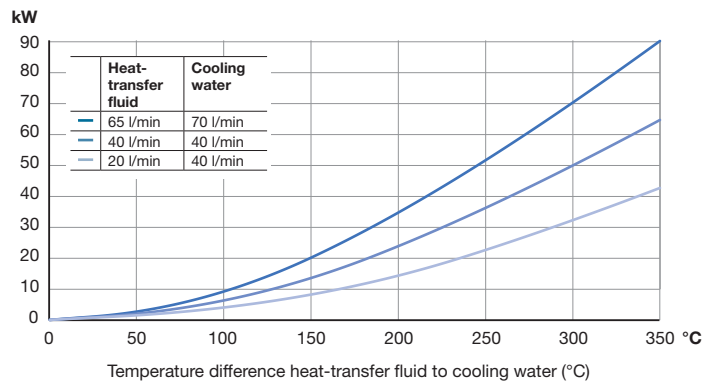

Pump capacity

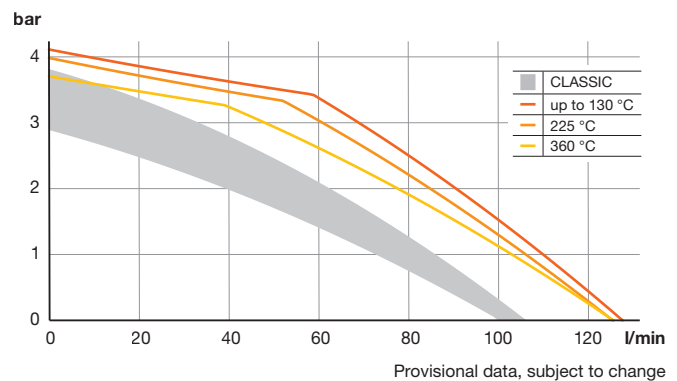

Technical specifications

	Oil	
Maximum temperature	360 °C (with heat transfer oil TOOL-THERM SH-3)	
Heating capacity	2 x 16 kW	2 x 24 kW
Filling volume (heat-transfer fluid)	30 litres	42 litres
Expansion volume	36 litres	36 litres
Pump		
Type A	Hermetically sealed magnetic coupling	
Type Z	Gear coupling, with mechanical seal	
Pressure and flow rate	See diagram	
Motor rated power	1.5 kW	
Control system	IRIS	
Temperature measurement	3-wire Pt100 (F0.15 acc. IEC 60751), feed and return	
Pump-pressure measurement	Piezoresistive pressure transmitter	
Flow measurement (heat-transfer fluid)	0-100 l/min, paddle-wheel sensor with inductive pickup	
Dimensions (L x W x H)	1240 x 720 x 1400 mm, incl. castors. Provisional dates, subject to change	
Connections		
Heat-transfer fluid (feed and return)	¾" BS female thread	
Cooling water inlet	1" BS female thread, with water filter	
Cooling water outlet	1" BS external thread	
Empty weight	335 kg	375 kg
Colour	RAL 7035	
Environment		
Temperature range	5-40 °C	
Relative humidity	40-80 % RH (non-condensing, no icing)	
Continuous noise level	< 70 dB (A)	
Power supply	200-240 V and 380-480 V, 50 and 60 Hz	
Ingress protection code	IP44, IP54 optional	
Marking	CE, UL-ready	